

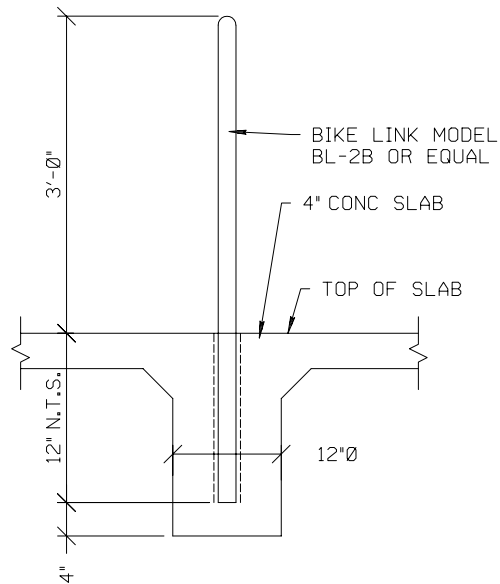
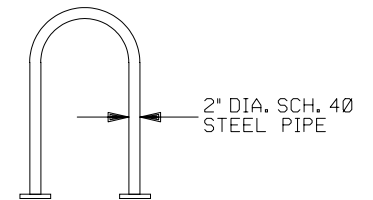


NOTE: ALTERNATIVE METHOD OF ANCHORING BIKE RACK IS SHOWN BELOW.



BICYCLE RACK  
CONNECTION DETAIL

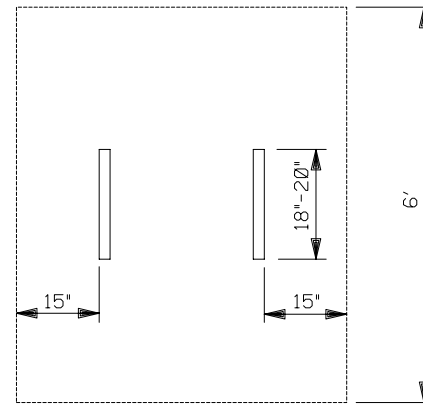

PREFERRED METHOD OF ANCHORING BIKE RACK IS TO ORDER BIKE RACK WITH STEEL FLANGE & RAMSET BOLTS TO CONCRETE SLAB PER MANUFACTURER'S INSTRUCTIONS.

BICYCLE RACK

NOTE:

1. MAINTAIN 6' LONG USUABLE SPACE FOR BICYCLE.
2. MAINTAIN 30" BETWEEN EACH RACK.
3. MAINTAIN 15' CLEAR DISTANCE BEYOND RACK.

ORIGINAL SIGNATURE ON FILE  
AT THE CITY OF TEMPE

APPROVED: \_\_\_\_\_  
DEPUTY PUBLIC WORKS DIRECTOR DATE

APPROVED: \_\_\_\_\_  
CITY ENGINEER DATE



CITY OF TEMPE  
PUBLIC WORKS DEPARTMENT

BICYCLE RACK DETAIL

DETAIL T-578  
1999